



Huntington 3 Series


HTG-3W

WALL

Brilliant by Design™, minimalistic aesthetic combined with our innovative Microstructure EdgeTech Optics (MEO)™ will bring your vision to light. The innovative MEO™ design utilizes high efficiency Microstructure Lenses and Light Guide Plates for high optical extraction and precise light management.

FEATURES

- Innovative Microstructure EdgeTech Optics™ delivers unparalleled optic control and exceptional performance with seamless illumination and uniformity. Specify Batwing, Glare Control, or Diffused (Lambertian) Optics.
- MEO™ allows for minimalistic 3" Aperture fixtures with extremely low profiles.
- Individual fixture lengths and seamless continuous rows with no lens breaks up to 300 feet.
- Surface Wall Mount
- Innovative Toolless "Push to Eject" System allows for easy installation and serviceability.
- No visible fasteners.
- Custom powder coat and anodized finishes.
- Specified Lumen Outputs (SLO) available.
- Proudly crafted in Huntington Beach, CA - USA.

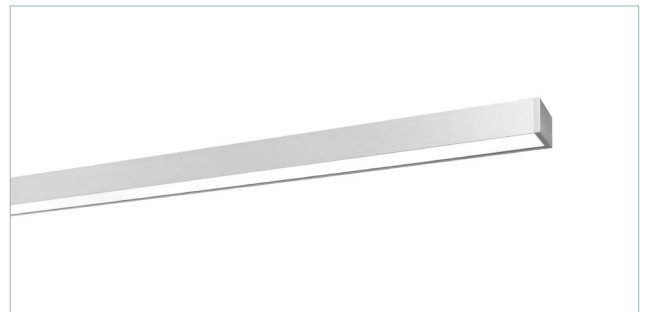

WALL

Performance Overview

4' Huntington 3 Direct - 3500K 90CRI MEODF				
Lumen Output	LL (Low)	ML (Medium)	HL (High)	SLO* (Specified)
Delivered Lumens	896	2208	4352	896-6852
Consumed Wattage	7	18	38	7.3 - 65.6
Efficacy (lm/W)	122	121	115	105-122
SDCM	3	3	3	3

*Specified Lumen Output (SLO) available in customizable lumen configurations (896 lm - 6852 lm). See SLO Configurator [HERE](#)



ORDERING INFORMATION

EXAMPLE: HTG-3W-TD-DT-48"-DLL-MEODF-27-VU-D-SA-EMC2-SW

Project: _____

Date: _____ Type: _____

Product Family	Driver Location	Mounting Direction	Length	Lumen Output	Optics
HTG-3W					
HTG-3W Huntington Series 3" Aperture (Wall Mount)	TD Integral Driver RD Remote Driver	DT Direct UT Indirect	_____* Specify length in 1 foot increments L_X _L Pattern PC Custom Pattern *Minimum Integral Driver length is 2". Minimum Remote In Canopy Driver can be shorter, consult factory. *Custom length fixtures can be ordered in 3" increments. *Any length over 8' requires multiple fixture segments.	DLL Low (224 l/ft @ 1.84 W)* DML Medium (552 l/ft @ 4.55 W)* DHL High (1088 l/ft @ 9.46 W)* SLO-XX Specified Lumen Output available.**	MEO MEODF Diffusing MEOBW Batwing MEOGC Glare Control MEORF Room Fill MEOCW* Ceiling Wash PRO** PROAY Asymmetric PROWD Wide PRONR Narrow *Indirect Only **PRO Optics are only available for indirect orientation and 90+ CRI. PRO Optics are not a diffused light source. LED pixelation will be seen with this optic choice.

Color Temp	Voltage	Driver	Finish	Options	Mounting
					SW
27 2700K 30 3000K 35 3500K 40 4000K 50 5000K TW 2700K-6500K (85+ CRI) XX Optional Color Temp & CRI Available	VU 120V-277V V3 347V	D* .1% 0-10V DN NON DIM DELV .1% Electronic Low Voltage Dimming (Reverse Phase dimming) DTRIAC .1% Electronic Low Voltage Dimming (Forward Phase dimming) DLI Lutron Hi-Lume .1% EcoSystem DE .1% 0-10V DD1 .1% DALI DDE .1% DALI DMX .1% DMX/RDM DTW .1% 0-10V Tunable White DDTW .1% DALI Tunable White XX Other (Please Specify) *Dim to Off available. Please Specify "OFF" next to driver option if required.	SA* Silver Anodized WP* Matte White BP* Matte Black CC** Custom SAMF SA Housing/Machine Finish End Caps WPMF WP Housing/Machine Finish End Caps BPMF BP Housing/Machine Finish End Caps CCMF CC Housing/Machine Finish End Caps *The housing finish and end cap finish will match. ** Custom Color (CC) to be provided in satin finish and color to be specified by a RAL number. The housing finish and end cap finish will match.	EMC_* Emergency Circuit(s) EMB_* Emergency Battery Pack(s) SOC* Occupancy Sensor SDL* Daylight Sensor BCS* Brilliant Communications Solutions (wired/wireless) MTC* Multiple Circuit(s) (Daylight, Occupancy, Zone Specific) JAB JAB Compliant *EMC: Specify quantity of emergency circuits. *EMB: Specify quantity of battery packs. Minimum 4" unit. *SOC & SDL: Specify spacing/location of sensor(s). *BCS: includes wired and wireless integration from our partners at nLight™, enlightened, Legrand, Crestron, Osram, Lutron and many more. *MTC: Circuit location(s) to be identified through factory supplied drawings	SW Surface Wall



Specifications

CONSTRUCTION One-piece heavy gauge 6063 extruded aluminum housing. Precision-machined aluminum end caps.

OPTICS Microstructure EdgeTech Optics (MEO)™ utilizes high efficiency Microstructure Lenses and Light Guide Plates for high optical extraction and precise light management. Specify Batwing, Glare Control, or Diffused (Lambertian) Optics.

LIGHT OUTPUT (3) Standard lumen packages are available: Low (DLL), Medium (DML) and High (DHL). Specified Lumen Output (SLO) packages available. Please see the (SLO) configurator at ExtantLighting.com.

LEDS Latest generation of premium Nichia 3-step MacAdam Ellipse LED's available in (90+ CRI) 2700K, 3000K, 3500K, 4000K. LED modules are easily accessible and replaceable.

VOLTAGE Universal 120/277V (VU) and 347V (V3) available. Consult factory for driver options when 347V is specified.

EMERGENCY BATTERY Factory provided low profile 10W emergency battery for UL924 required 90-minute run time (optional).

FINISH Standard finishes include silver anodized, powder coated white or powder coated black. Custom anodized and powder coated finishes available (RAL number matched).

CONTINUOUS ROWS Innovative Toolless Latch System ensures simple installation. Seamless continuous rows with no lens breaks, pixelation or hotspots up to 300 feet with MEODF or 250 feet with MEOGC.

PATTERNS Standard and L Pattern (L) available. Custom patterns available.

MOUNTING Wall Mount.


APPROVALS UL and cUL Listed. Approved for Dry/Damp locations. Made in the USA. JA8 Approved.

LUMEN MAINTENANCE (L70) 70% of initial light output = Reported > 60,000 hours | Calculated > 200,000 hours (L90) 90% of initial light output = Reported > 60,000 hours | Calculated > 200,000 hours.

WARRANTY HTG 3 offered with a 5-year limited warranty. 5-year limited warranty covers LED, Driver and fixture. For further details, refer to General Warranty and Obligations at ExtantLighting.com.

PATENTS Extant Lighting's intellectual property is protected under Patent No. US 11,378,262 B2 by the U.S. Patent Office.

Dimensions

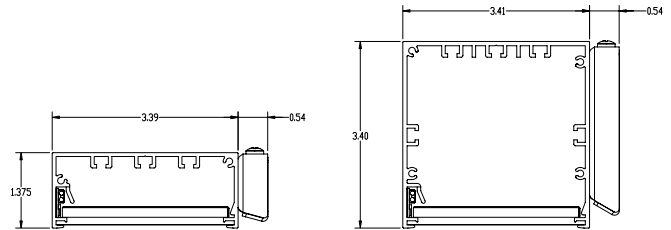


HTG-3 REMOTE

HTG-3 REMOTE

Patterns

Note: Patterns shown and ordered in Plan View.




L__X__
L-Shape
Provide AxB
Example: L6'x4'




Microstructure EdgeTech Optics (MEO)™

MEO™ Optics can be specified in direct and indirect orientation. Our innovative MEO™ design utilizes high efficiency Microstructure Lenses and Light Guide Plates for high optical extraction and precise light management. MEO™ delivers exceptional light quality with seamless illumination and uniformity with no pixelation, hot spots or lens breaks up to 300° (MEODF, MEOGC, MEORF, MEOCW) or 250° (MEOBW).


DIRECT

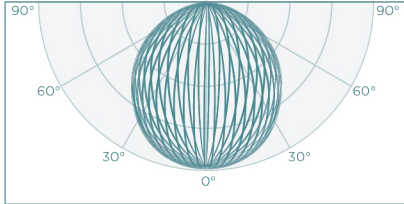


MEODF
LAMBERTIAN

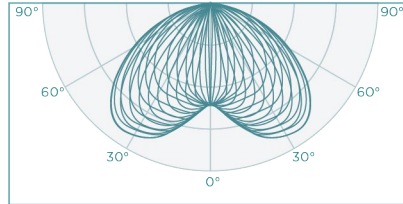

MEOBW
BATWING

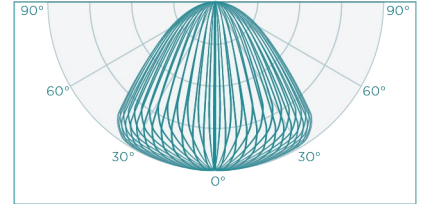


MEOGC
GLARE CONTROL

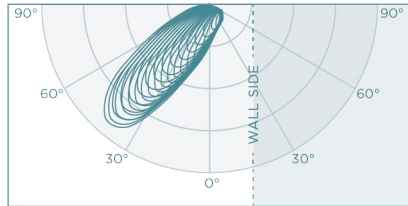


MEORF
ROOM FILL


INDIRECT

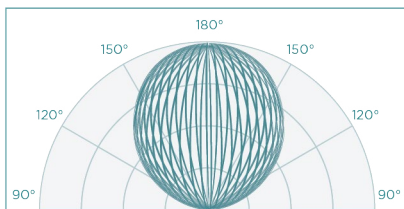


MEODF
LAMBERTIAN

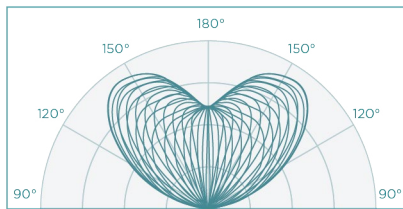

MEOBW
BATWING

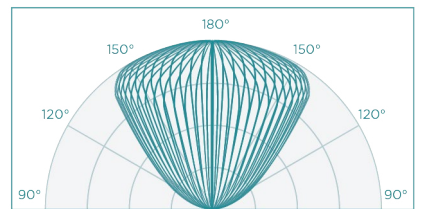

MEOGC
GLARE CONTROL

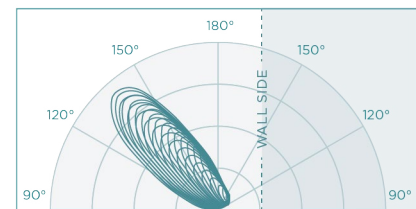

MEOCW
CEILING WASH




Precision Refractive Optics (PRO)


Precision Refractive Optics (PRO) are designed to produce precise optic control for diverse design applications. PRO Optics are only available in indirect orientation. PRO utilizes the latest in extruded lens technology that mount directly to the LED board channel to give optimum control.

Please Note: The PRO optics are not a diffused light source. LED pixelation will be seen with this optic choice. If you want a completely diffused light source with no pixelation or hot spots, see our Microstructure EdgeTech Optics (MEO)™ options.


INDIRECT

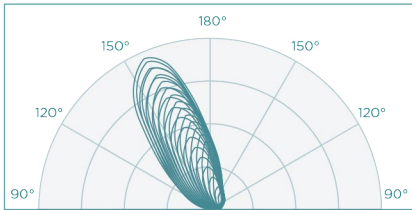

PROAY
ASYMMETRIC

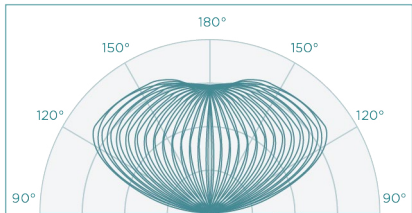

PROWD
WIDE

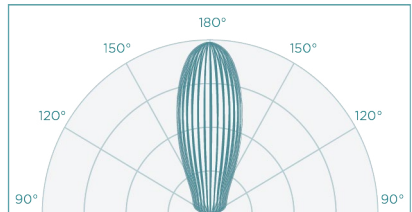

PRONR
NARROW

Continuous Row Detail

NOTE: Detail below is specific to the Surface Wall only. For additional Continuous Row Detail, please visit ExtantLighting.com

Nominal Row Length (ft)	Segment Lengths (ft)	Overall Row Length
9	5 + 4	9' 1/2"
10	6 + 4	10' 1/2"
11	7 + 4	11' 1/2"
12	8 + 4	12' 1/2"
13	8 + 5	13' 1/2"
14	8 + 6	14' 1/2"
15	8 + 7	15' 1/2"
16	8 + 8	16' 1/2"
17	8 + 5 + 4	17' 1/2"
18	8 + 6 + 4	18' 1/2"
19	8 + 7 + 4	19' 1/2"
20	8 + 8 + 4	20' 1/2"
21	8 + 8 + 5	21' 1/2"
22	8 + 8 + 6	22' 1/2"
23	8 + 8 + 7	23' 1/2"
24	8 + 8 + 8	24' 1/2"
25	8 + 8 + 5 + 4	25' 1/2"
26	8 + 8 + 6 + 4	26' 1/2"
27	8 + 8 + 7 + 4	27' 1/2"
28	8 + 8 + 8 + 4	28' 1/2"
29	8 + 8 + 8 + 5	29' 1/2"
30	8 + 8 + 8 + 6	30' 1/2"
31	8 + 8 + 8 + 7	31' 1/2"
32	8 + 8 + 8 + 8	32' 1/2"
33	8 + 8 + 8 + 5 + 4	33' 1/2"
34	8 + 8 + 8 + 6 + 4	34' 1/2"
35	8 + 8 + 8 + 7 + 4	35' 1/2"
36	8 + 8 + 8 + 8 + 4	36' 1/2"
37	8 + 8 + 8 + 8 + 5	37' 1/2"
38	8 + 8 + 8 + 8 + 6	38' 1/2"
39	8 + 8 + 8 + 8 + 7	39' 1/2"
40	8 + 8 + 8 + 8 + 8	40' 1/2"
41	8 + 8 + 8 + 8 + 5 + 4	41' 1/2"
42	8 + 8 + 8 + 8 + 6 + 4	42' 1/2"
43	8 + 8 + 8 + 8 + 7 + 4	43' 1/2"
44	8 + 8 + 8 + 8 + 8 + 4	44' 1/2"
45	8 + 8 + 8 + 8 + 8 + 5	45' 1/2"
46	8 + 8 + 8 + 8 + 8 + 6	46' 1/2"
47	8 + 8 + 8 + 8 + 8 + 7	47' 1/2"
48	8 + 8 + 8 + 8 + 8 + 8	48' 1/2"




Installation

Thoughtful engineering is at the core of all of our fixture designs. All of our products are thoughtfully engineered and include innovative features that create a sophisticated fixture that is also contractor friendly and easy to install and service.


PUSH TO EJECT SYSTEM

Innovative “Push to Eject” System allows for toolless removal and installation of the Light Guide Plate. This thoughtful engineering creates easy access into the housing for simple installation and serviceability.

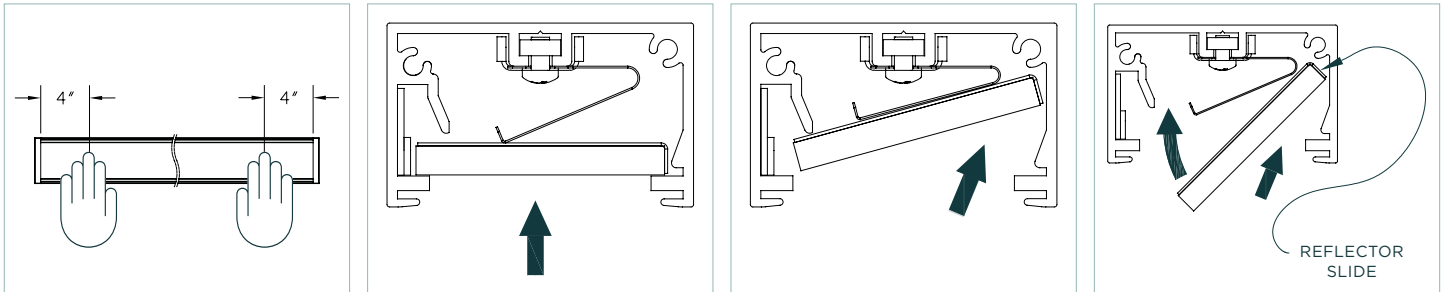

TOOLLESS LATCH SYSTEM

Our Toolless Latch System is designed to securely connect the extrusions of the continuous runs without the use of any tools, screws or external parts. Our innovative design allows the contractor to perfectly align the extrusion with the built-in alignment pins and cinch up the extrusion with the Toolless Latch System for a tight fit. The Toolless Latch System eliminates gaps and ensures perfect alignment.

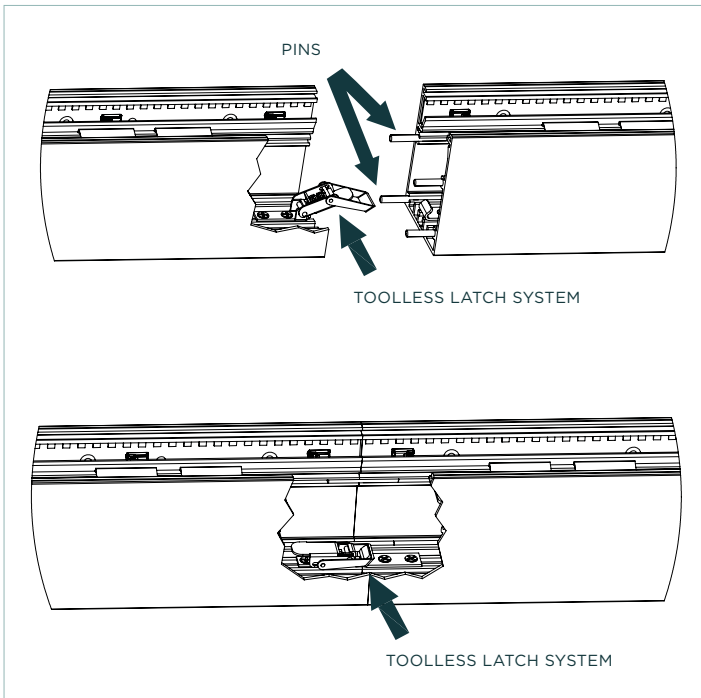

QUICK-CLICK 5-WIRE SYSTEM

Our Quick-Click 5-Wire System connects the continuous run through wiring with a simple push and click connection. The Quick-Click System is contractor friendly and decreases installation time and cost and ensures proper wiring.

