



Huntington 1 Series

# HTG-1W-MM

WALL | ARM

Brilliant by Design™, minimalistic aesthetic combined with our innovative Microstructure EdgeTech Optics (MEO)™ will bring your vision to light. The Huntington 1 Mullion Mount offers unprecedented optics, seamless illumination and multiple mounting options for quick and simple installation.



WALL | ARM

## FEATURES

- Microstructure EdgeTech Optics™ delivers unparalleled optic control and exceptional performance with seamless illumination and uniformity. Specify Batwing, Glare Control, Diffused (Lambertian), Wall Wash, Room Fill or Ceiling Wash Optics.
- MEO™ allows for minimalistic 1.5" Aperture x 2.38" Depth
- Direct or Indirect illumination.
- Individual fixture lengths and seamless continuous rows with no lens breaks up to 300 feet.
- Window mullion mount or over doorways.
- Innovative mounting options (Backfeed or End Feed)
- Patented Toolless "Push to Eject" System allows for easy installation and serviceability.
- No visible fasteners.
- Custom powder coat and anodized finishes.
- Specified Lumen Outputs (SLO) available.
- Proudly crafted in Huntington Beach, CA - USA.

## Performance Overview

4' Huntington 1 Direct - 3500K 90CRI MEODF				
Lumen Output	LL (Low)	ML (Medium)	HL (High)	SLO* (Specified)
Delivered Lumens	772	1908	3760	772-5920
Consumed Wattage	7	18	38	7.3 - 65.6
Efficacy (lm/W)	105	105	99	90-105
SDCM	3	3	3	3

\*Specified Lumen Output (SLO) available in customizable lumen configurations (896 lm - 6852 lm). See SLO Configurator [HERE](#)



**ORDERING INFORMATION**

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_  
 PRODUCT \_\_\_\_\_ QTY \_\_\_\_\_

Product Family	Driver Location	Mounting Direction	Length
<b>HTG-1W-MM</b> Huntington Series 1.5" Aperture (Mullion Mount)	<input type="checkbox"/> <b>TD</b> Integral Driver	<input type="checkbox"/> <b>DT</b> Direct (Down) <input type="checkbox"/> <b>UT</b> Indirect (Up) *For Direct & Indirect illumination in one housing see Huntington 1 - Mullion Mount - Direct   Indirect spec sheet	<input type="checkbox"/> _____* Specify length in 1 foot increments <input type="checkbox"/> <b>L_X_</b> L Pattern <input type="checkbox"/> <b>CP</b> Custom Pattern *Minimum length is 2'. *Custom length fixtures can be ordered in 3" increments. *Any length over 8' requires multiple fixture segments.

Lumen Output	Optics	Color Temp	Voltage
<input type="checkbox"/> <b>DLL</b> Low (193 l/ft @ 1.84 W)* <input type="checkbox"/> <b>DML</b> Medium (477 l/ft @ 4.55 W)* <input type="checkbox"/> <b>DHL</b> High (940 l/ft @ 9.46 W)* <input type="checkbox"/> <b>SLO-XX</b> **Specified Lumen Output available. *Delivered lumen output & consumed wattage based on "MEODF 35" (90 CRI - 3500K). See SLO Configurator for alternate outputs.	<p style="text-align: center;"><b>MEO</b></p> <input type="checkbox"/> <b>MEODF</b> Diffusing <input type="checkbox"/> <b>MEOBW</b> Batwing <input type="checkbox"/> <b>MEOGC</b> Glare Control <input type="checkbox"/> <b>MEORF***</b> Room Fill <input type="checkbox"/> <b>MEOCW**</b> Ceiling Wash <p style="text-align: center;"><b>PRO*</b></p> <input type="checkbox"/> <b>PROAY</b> Asymmetric <input type="checkbox"/> <b>PROWD</b> Wide <input type="checkbox"/> <b>PRONR</b> Narrow *PRO Optics are only available in 90+ CRI *PRO Optics are not a diffused light source. LED pixelation will be seen with this optic choice. **See Page 4 for Optic Detail **Indirect Only ***Direct Only	<p style="text-align: center;"><b>90+ CRI</b></p> <input type="checkbox"/> <b>27</b> 2700K <input type="checkbox"/> <b>30</b> 3000K <input type="checkbox"/> <b>35</b> 3500K <input type="checkbox"/> <b>40</b> 4000K <input type="checkbox"/> <b>50</b> 5000K <input type="checkbox"/> <b>XX</b> Optional Color Temp & CRI Available	<input type="checkbox"/> <b>VU</b> 120V-277V <input type="checkbox"/> <b>V3</b> 347V

Driver	Finish	Options
<input type="checkbox"/> <b>D*</b> 1% 0-10V <input type="checkbox"/> <b>DN</b> NON DIM <input type="checkbox"/> <b>DL1</b> Lutron Hi-Lume 1% EcoSystem <input type="checkbox"/> <b>DE*</b> .1% 0-10V <input type="checkbox"/> <b>DD1</b> 1% DALI <input type="checkbox"/> <b>DDE</b> .1% DALI <input type="checkbox"/> <b>DMX</b> .1% DMX/RDM <input type="checkbox"/> <b>DELV</b> 1% Electronic Low Voltage Dimming (Reverse Phase) <input type="checkbox"/> <b>DTRIAC</b> 1% Electronic Low Voltage Dimming (Forward Phase) <input type="checkbox"/> <b>XX</b> Other (Please Specify) *Dim to Off available. Please Specify "-OFF" next to driver option if required.	<input type="checkbox"/> <b>SA*</b> Silver Anodized <input type="checkbox"/> <b>WP*</b> Matte White <input type="checkbox"/> <b>BP*</b> Matte Black <input type="checkbox"/> <b>CC*</b> Custom *When above finish selected, the housing finish and end cap finish will match <input type="checkbox"/> <b>SAMF</b> SA Housing/Machine Finish End Caps <input type="checkbox"/> <b>WPMF</b> WP Housing/Machine Finish End Caps <input type="checkbox"/> <b>BPMF</b> BP Housing/Machine Finish End Caps <input type="checkbox"/> <b>CCMF</b> CC Housing/Machine Finish End Caps	<input type="checkbox"/> <b>EMB_*_</b> Emergency Battery Pack(s) <input type="checkbox"/> <b>EMC_*_</b> Emergency Circuit(s) <input type="checkbox"/> <b>SOC*</b> Occupancy Sensor <input type="checkbox"/> <b>SDL*</b> Daylight Sensor <input type="checkbox"/> <b>BCS*</b> Brilliant Communications Solutions (wired/wireless) <input type="checkbox"/> <b>JAB</b> JAB Approved BCS: includes wired and wireless integration from our partners at nLight™, Enlighted, Legrand, Crestron, Osram, Lutron and many more. Contact Extant for details. EMB: Specify quantity of battery packs. Minimum 4' unit. EMC: Specify quantity of emergency circuits. SOC & SDL: Specify spacing/location of sensors(s).



## Specifications

**CONSTRUCTION** One-piece heavy gauge 6063 extruded aluminum housing. Precision-machined aluminum end caps.

**OPTICS** Microstructure EdgeTech Optics (MEO)™ utilizes high efficiency Microstructure Lenses and Light Guide Plates for high optical extraction and precise light management. Specify Batwing, Glare Control, Diffused (Lambertian), Ceiling Wash or Room Fill Optics.

**LIGHT OUTPUT** (3) Standard lumen packages are available: Low (DLL), Medium (DML) and High (DHL). Specified Lumen Output (SLO) packages available. Please see the (SLO) configurator at [ExtantLighting.com](http://ExtantLighting.com).

**LEDS** Latest generation of premium Nichia 3-step MacAdam Ellipse LED's available in (90+ CRI) 2700K, 3000K, 3500K, 4000K. LED modules are easily accessible and replaceable.

**VOLTAGE** Universal 120/277V (VU) and 347V (V3) available. Consult factory for driver options when 347V is specified.

**EMERGENCY BATTERY** Factory provided low profile 10W emergency battery for UL924 required 90-minute run time (optional).

**FINISH** Standard finishes include silver anodized, powder coated white or powder coated black. Custom anodized and powder coated finishes available (RAL number matched).

**CONTINUOUS ROWS** Innovative Toolless Latch System ensures simple installation. Seamless continuous rows with no lens breaks, pixelation or hotspots up to 300 feet (MEODF, MEOGC, MEOWW, MEORF) or 250 feet (MEOBW).

**MOUNTING** Mullion or Over Door mount with Back Feed or End Feed Options.

**APPROVALS** UL and cUL Listed. Approved for Dry/Damp locations. Made in the USA. JA8 Approved.


**LUMEN MAINTENANCE** (L70) 70% of initial light output = Reported > 60,000 hours | Calculated > 200,000 hours (L90) 90% of initial light output = Reported > 60,000 hours | Calculated > 200,000 hours.

**WARRANTY** HTG 1 offered with a 5-year limited warranty. 5-year limited warranty covers LED, Driver and fixture. For further details, refer to General Warranty and Obligations at [ExtantLighting.com](http://ExtantLighting.com).

**PATENTS** Extant Lighting's intellectual property is protected under Patent No. US 11,378,262 B2 by the U.S. Patent Office.

## Dimensions


See installation instructions for more detail on mounting brackets

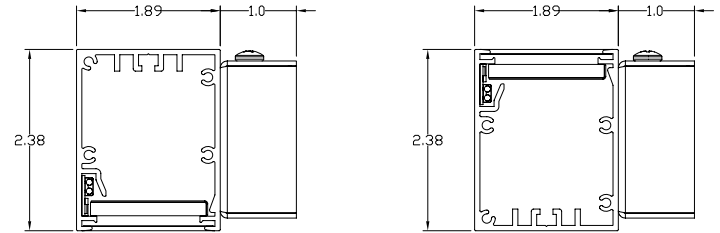


DIRECT

INDIRECT

## End Feed

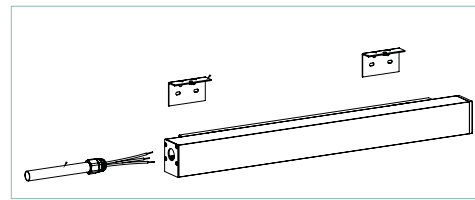

## Back Feed

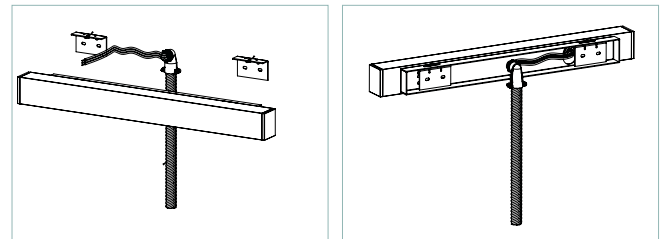


See installation instructions for more detail


**Microstructure EdgeTech Optics (MEO)™**

MEO™ Optics can be specified in direct and indirect orientation. Our innovative MEO™ design utilizes high efficiency Microstructure Lenses and Light Guide Plates for high optical extraction and precise light management. MEO™ delivers exceptional light quality with seamless illumination and uniformity with no pixelation, hot spots or lens breaks up to 300' (MEODF, MEOGC, MEORF) or 250' (MEOBW).


**DIRECT**

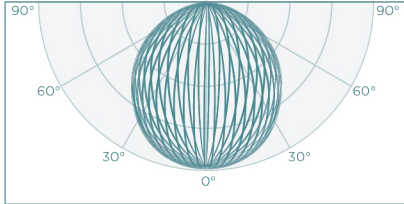


**MEODF**  
LAMBERTIAN

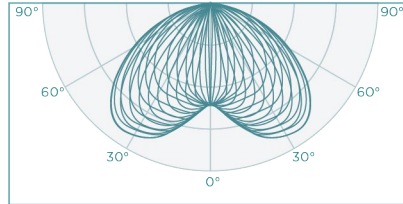

**MEOBW**  
BATWING

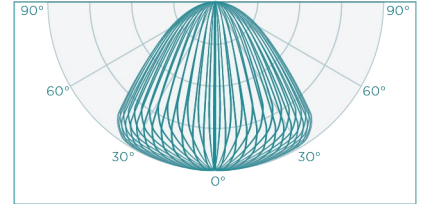


**MEOGC**  
GLARE CONTROL

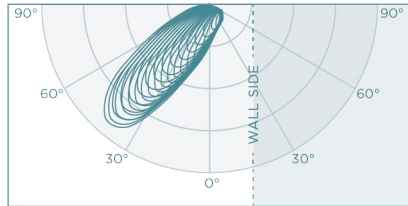


**MEORF**  
ROOM FILL


**INDIRECT**

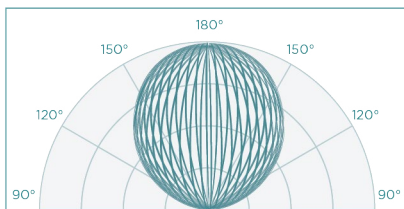


**MEODF**  
LAMBERTIAN

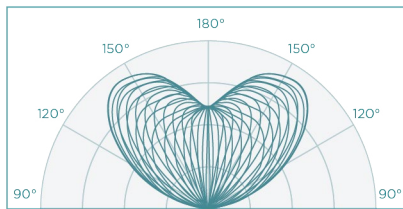

**MEOBW**  
BATWING

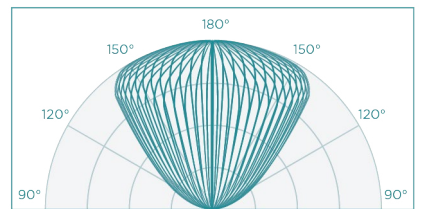

**MEOGC**  
GLARE CONTROL

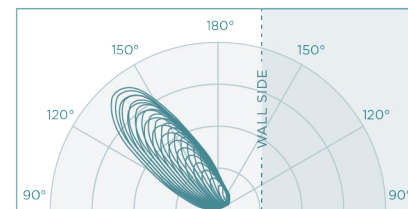

**MEOCW**  
CEILING WASH




### Precision Refractive Optics (PRO)


Precision Refractive Optics (PRO) are designed to produce precise optic control for diverse design applications. PRO Optics are only available in indirect orientation. PRO utilizes the latest in extruded lens technology that mount directly to the LED board channel to give optimum control.

Please Note: The PRO optics are not a diffused light source. LED pixelation will be seen with this optic choice. If you want a completely diffused light source with no pixelation or hot spots, see our Microstructure EdgeTech Optics (MEO)™ options.


#### INDIRECT

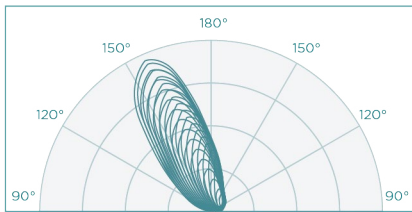

**PROAY**  
ASYMMETRIC

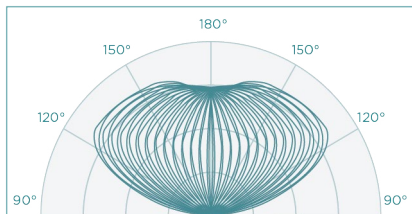

**PROWD**  
WIDE

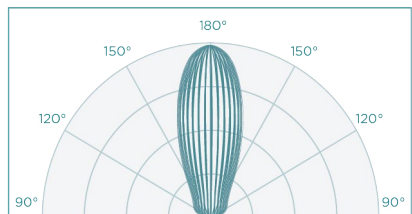

**PRONR**  
NARROW

### Continuous Row Detail

*NOTE: Detail below is specific to the Surface Wall only. For additional Continuous Row Detail, please visit [ExtantLighting.com](http://ExtantLighting.com)*

Nominal Row Length (ft)	Segment Lengths (ft)	Overall Row Length
9	5 + 4	9' 1/2"
10	6 + 4	10' 1/2"
11	7 + 4	11' 1/2"
12	8 + 4	12' 1/2"
13	8 + 5	13' 1/2"
14	8 + 6	14' 1/2"
15	8 + 7	15' 1/2"
16	8 + 8	16' 1/2"
17	8 + 5 + 4	17' 1/2"
18	8 + 6 + 4	18' 1/2"
19	8 + 7 + 4	19' 1/2"
20	8 + 8 + 4	20' 1/2"
21	8 + 8 + 5	21' 1/2"
22	8 + 8 + 6	22' 1/2"
23	8 + 8 + 7	23' 1/2"
24	8 + 8 + 8	24' 1/2"
25	8 + 8 + 5 + 4	25' 1/2"
26	8 + 8 + 6 + 4	26' 1/2"
27	8 + 8 + 7 + 4	27' 1/2"
28	8 + 8 + 8 + 4	28' 1/2"
29	8 + 8 + 8 + 5	29' 1/2"
30	8 + 8 + 8 + 6	30' 1/2"
31	8 + 8 + 8 + 7	31' 1/2"
32	8 + 8 + 8 + 8	32' 1/2"
33	8 + 8 + 8 + 5 + 4	33' 1/2"
34	8 + 8 + 8 + 6 + 4	34' 1/2"
35	8 + 8 + 8 + 7 + 4	35' 1/2"
36	8 + 8 + 8 + 8 + 4	36' 1/2"
37	8 + 8 + 8 + 8 + 5	37' 1/2"
38	8 + 8 + 8 + 8 + 6	38' 1/2"
39	8 + 8 + 8 + 8 + 7	39' 1/2"
40	8 + 8 + 8 + 8 + 8	40' 1/2"
41	8 + 8 + 8 + 8 + 5 + 4	41' 1/2"
42	8 + 8 + 8 + 8 + 6 + 4	42' 1/2"
43	8 + 8 + 8 + 8 + 7 + 4	43' 1/2"
44	8 + 8 + 8 + 8 + 8 + 4	44' 1/2"
45	8 + 8 + 8 + 8 + 8 + 5	45' 1/2"
46	8 + 8 + 8 + 8 + 8 + 6	46' 1/2"
47	8 + 8 + 8 + 8 + 8 + 7	47' 1/2"
48	8 + 8 + 8 + 8 + 8 + 8	48' 1/2"




**Installation**

Thoughtful engineering is at the core of all of our fixture designs. All of our products are thoughtfully engineered and include innovative features that create a sophisticated fixture that is also contractor friendly and easy to install and service.


**PUSH TO EJECT SYSTEM**

Innovative “Push to Eject” System allows for toolless removal and installation of the Light Guide Plate. This thoughtful engineering creates easy access into the housing for simple installation and serviceability.

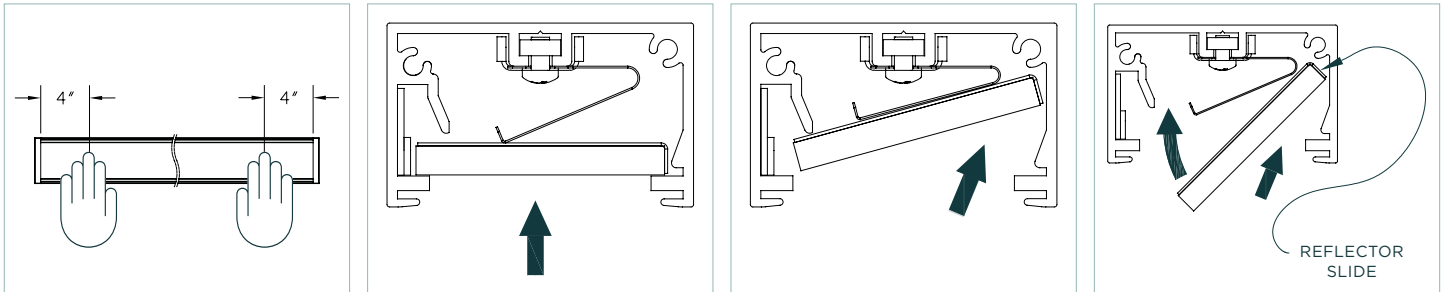

**TOOLLESS LATCH SYSTEM**

Our Toolless Latch System is designed to securely connect the extrusions of the continuous runs without the use of any tools, screws or external parts. Our innovative design allows the contractor to perfectly align the extrusion with the built-in alignment pins and cinch up the extrusion with the Toolless Latch System for a tight fit. The Toolless Latch System eliminates gaps and ensures perfect alignment.

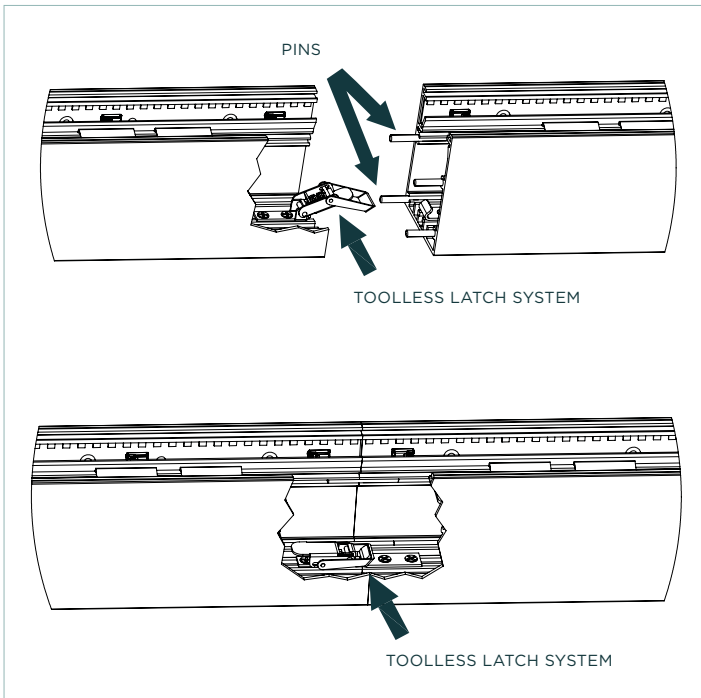

**QUICK-CLICK 5-WIRE SYSTEM**

Our Quick-Click 5-Wire System connects the continuous run through wiring with a simple push and click connection. The Quick-Click System is contractor friendly and decreases installation time and cost and ensures proper wiring.

