


HUNTINGTON 1 - DIRECT | INDIRECT (DU)


SUSPENDED | AIRCRAFT CABLE (AC) | REMOTE DRIVER (RD) or IN-CANOPY DRIVER (CD)

STAND ALONE

Nominal Fixture Length (ft)	Stand Alone Cable Center (in)	Stand Alone Overall Length
2	20 ½"	24 ½"
3	32 ½"	36 ½"
4	44 ½"	48 ½"
5	56 ½"	60 ½"
6	68 ½"	72 ½"
7	80 ½"	84 ½"
8	92 ½"	96 ½"

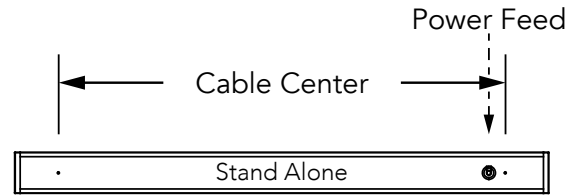

CONTINUOUS ROW

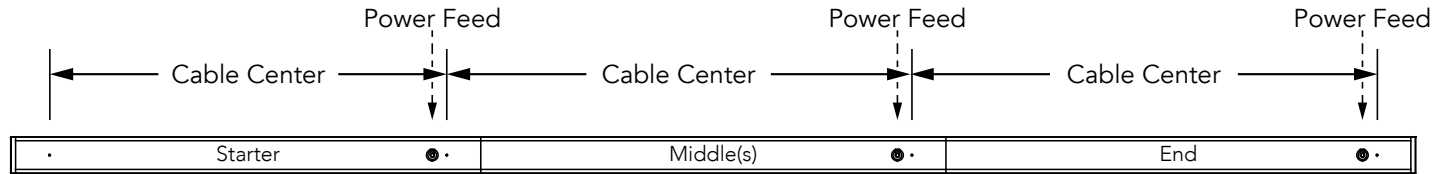

Nominal Fixture Length (ft)	Starter Cable Center	Middle Cable Center	End Cable Center
2	20 ½"	24"	24"
3	32 ½"	36"	36"
4	44 ½"	48"	48"
5	56 ½"	60"	60"
6	68 ½"	72"	72"
7	80 ½"	84"	84"
8	92 ½"	96"	96"

Nominal Row Length (ft)	Segment Lengths (ft)	Overall Row Length	Nominal Row Length (ft)	Segment Lengths (ft)	Overall Row Length
9	5 + 4	9' ½"	29	8 + 8 + 8 + 5	29' ½"
10	6 + 4	10' ½"	30	8 + 8 + 8 + 6	30' ½"
11	7 + 4	11' ½"	31	8 + 8 + 8 + 7	31' ½"
12	8 + 4	12' ½"	32	8 + 8 + 8 + 8	32' ½"
13	8 + 5	13' ½"	33	8 + 8 + 8 + 5 + 4	33' ½"
14	8 + 6	14' ½"	34	8 + 8 + 8 + 6 + 4	34' ½"
15	8 + 7	15' ½"	35	8 + 8 + 8 + 7 + 4	35' ½"
16	8 + 8	16' ½"	36	8 + 8 + 8 + 8 + 4	36' ½"
17	8 + 5 + 4	17' ½"	37	8 + 8 + 8 + 8 + 5	37' ½"
18	8 + 6 + 4	18' ½"	38	8 + 8 + 8 + 8 + 6	38' ½"
19	8 + 7 + 4	19' ½"	39	8 + 8 + 8 + 8 + 7	39' ½"
20	8 + 8 + 4	20' ½"	40	8 + 8 + 8 + 8 + 8	40' ½"
21	8 + 8 + 5	21' ½"	41	8 + 8 + 8 + 8 + 5 + 4	41' ½"
22	8 + 8 + 6	22' ½"	42	8 + 8 + 8 + 8 + 6 + 4	42' ½"
23	8 + 8 + 7	23' ½"	43	8 + 8 + 8 + 8 + 7 + 4	43' ½"
24	8 + 8 + 8	24' ½"	44	8 + 8 + 8 + 8 + 8 + 4	44' ½"
25	8 + 8 + 5 + 4	25' ½"	45	8 + 8 + 8 + 8 + 8 + 5	45' ½"
26	8 + 8 + 6 + 4	26' ½"	46	8 + 8 + 8 + 8 + 8 + 6	46' ½"
27	8 + 8 + 7 + 4	27' ½"	47	8 + 8 + 8 + 8 + 8 + 7	47' ½"
28	8 + 8 + 8 + 4	28' ½"	48	8 + 8 + 8 + 8 + 8 + 8	48' ½"

* Due to our culture of always striving for product enhancement, specifications and information within this document are subject to change without notice. 2020 Extant Lighting, Inc. All rights reserved.

