


**HUNTINGTON 1 - DIRECT | INDIRECT**

SUSPENDED | AIRCRAFT CABLE ROTATIONAL (AR) | INTEGRAL DRIVER (TD)


STAND ALONE

Nominal Fixture Length (ft)	Stand Alone Cable Center (in)	Stand Alone Overall Length
2	26 ¼"	27 ¼"
3	38 ¼"	39 ¼"
4	50 ¼"	51 ¼"
5	62 ¼"	63 ¼"
6	74 ¼"	75 ¼"
7	86 ¼"	86 ¼"
8	98 ¼"	98 ¼"

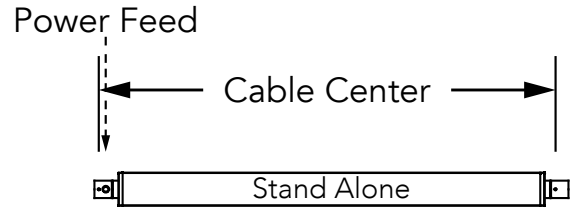

CONTINUOUS ROW

Power Feed

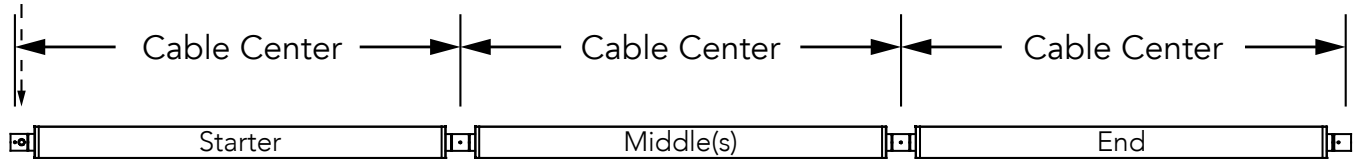

Nominal Fixture Length (ft)	Starter Cable Center	Middle Cable Center	End Cable Center
2	26 ¼"	26 ¼"	26 ¼"
3	38 ¼"	38 ¼"	38 ¼"
4	50 ¼"	50 ¼"	50 ¼"
5	62 ¼"	62 ¼"	62 ¼"
6	74 ¼"	74 ¼"	74 ¼"
7	86 ¼"	86 ¼"	86 ¼"
8	98 ¼"	98 ¼"	98 ¼"

Nominal Row Length (ft)	Segment Lengths (ft)	Overall Row Length	Nominal Row Length (ft)	Segment Lengths (ft)	Overall Row Length
9	5 + 4	9' 5 ½"	30	8 + 8 + 8 + 5	29' 10"
10	6 + 4	10' 5 ½"	31	8 + 8 + 8 + 6	30' 10"
11	7 + 4	11' 5 ½"	32	8 + 8 + 8 + 7	31' 10"
12	8 + 4	12' 5 ½"	33	8 + 8 + 8 + 8	32' 10"
13	8 + 5	13' 5 ½"	34	8 + 8 + 8 + 5 + 4	34' ¼"
14	8 + 6	14' 5 ½"	35	8 + 8 + 8 + 6 + 4	35' ¼"
15	8 + 7	15' 5 ½"	36	8 + 8 + 8 + 7 + 4	36' ¼"
16	8 + 8	16' 5 ½"	37	8 + 8 + 8 + 8 + 4	37' ¼"
17	8 + 5 + 4	17' 7 ¾"	38	8 + 8 + 8 + 8 + 5	38' ¼"
18	8 + 6 + 4	18' 7 ¾"	39	8 + 8 + 8 + 8 + 6	39' ¼"
19	8 + 7 + 4	19' 7 ¾"	40	8 + 8 + 8 + 8 + 7	40' ¼"
20	8 + 8 + 4	20' 7 ¾"	41	8 + 8 + 8 + 8 + 8	41' ¼"
21	8 + 8 + 5	21' 7 ¾"	42	8 + 8 + 8 + 8 + 5 + 4	42' 2 ½"
22	8 + 8 + 6	22' 7 ¾"	43	8 + 8 + 8 + 8 + 6 + 4	43' 2 ½"
23	8 + 8 + 7	23' 7 ¾"	44	8 + 8 + 8 + 8 + 7 + 4	44' 2 ½"
24	8 + 8 + 8	24' 7 ¾"	45	8 + 8 + 8 + 8 + 8 + 4	45' 2 ½"
26	8 + 8 + 5 + 4	25' 10"	46	8 + 8 + 8 + 8 + 8 + 5	46' 2 ½"
27	8 + 8 + 6 + 4	26' 10"	47	8 + 8 + 8 + 8 + 8 + 6	47' 2 ½"
28	8 + 8 + 7 + 4	27' 10"	48	8 + 8 + 8 + 8 + 8 + 7	48' 2 ½"
29	8 + 8 + 8 + 4	28' 10"	49	8 + 8 + 8 + 8 + 8 + 8	49' 2 ½"

\* Due to our culture of always striving for product enhancement, specifications and information within this document are subject to change without notice. 2020 Extant Lighting, Inc. All rights reserved.

